Begin DP	End DP	Sub-Basins Served	Basin Size (Ac.)	Total Population Served	Average Flow (gpm)	Peaking Factor	Peak Flow (gpm)	Q ultimate (MGD)	Size (inch)	Slope	Q Cap (MGD)	Length (ft)
DP1	DP2	SB1& partial of SB2	188.21	4400	305.52	3.30	1007.00	1.450	12	0.40%	1.46	2122
DP2	DP3	SB1&SB2	188.21	4400	305.52	3.30	1007.00	1.450	12	0.40%	1.46	798
DP3	DP4	SB1,SB2 & SB4	237.16	5281	366.71	3.22	1181.88	1.702	12	0.55%	1.71	939
DP4	DP5	SB1,SB2, SB3, SB4 & SB6	327.16	6415	445.46	3.14	1400.10	2.016	15	0.24%	2.04	2638
DP5	DP6	SB1, SB2, SB3, SB4, SB6, SB7 & SB8	462.86	8363	580.78	3.03	1760.57	2.535	18	0.14%	2.54	1720
DP6	DP8	SB1, SB2, SB3, SB4, SB6, SB7, SB8, SB9, SB15 & SB16	896.69	13850	952.68	2.81	2680.00	3.859	21	0.15%	3.97	1860
DP7	DP8	SB5 & SB10	64.52	902	62.64	3.83	239.82	0.345	8	0.40%	0.49	1632
DP8	DP9	SB1-11, SB15 & SB16	979.73	15358	1057.41	2.77	2926.82	4.215	21	0.17%	4.22	1526
DP9	DP10	SB1-16	2064.59	30164	2085.63	2.47	5161.72	7.433	27	0.14%	7.50	6260
Proposed LS	DP9											8200

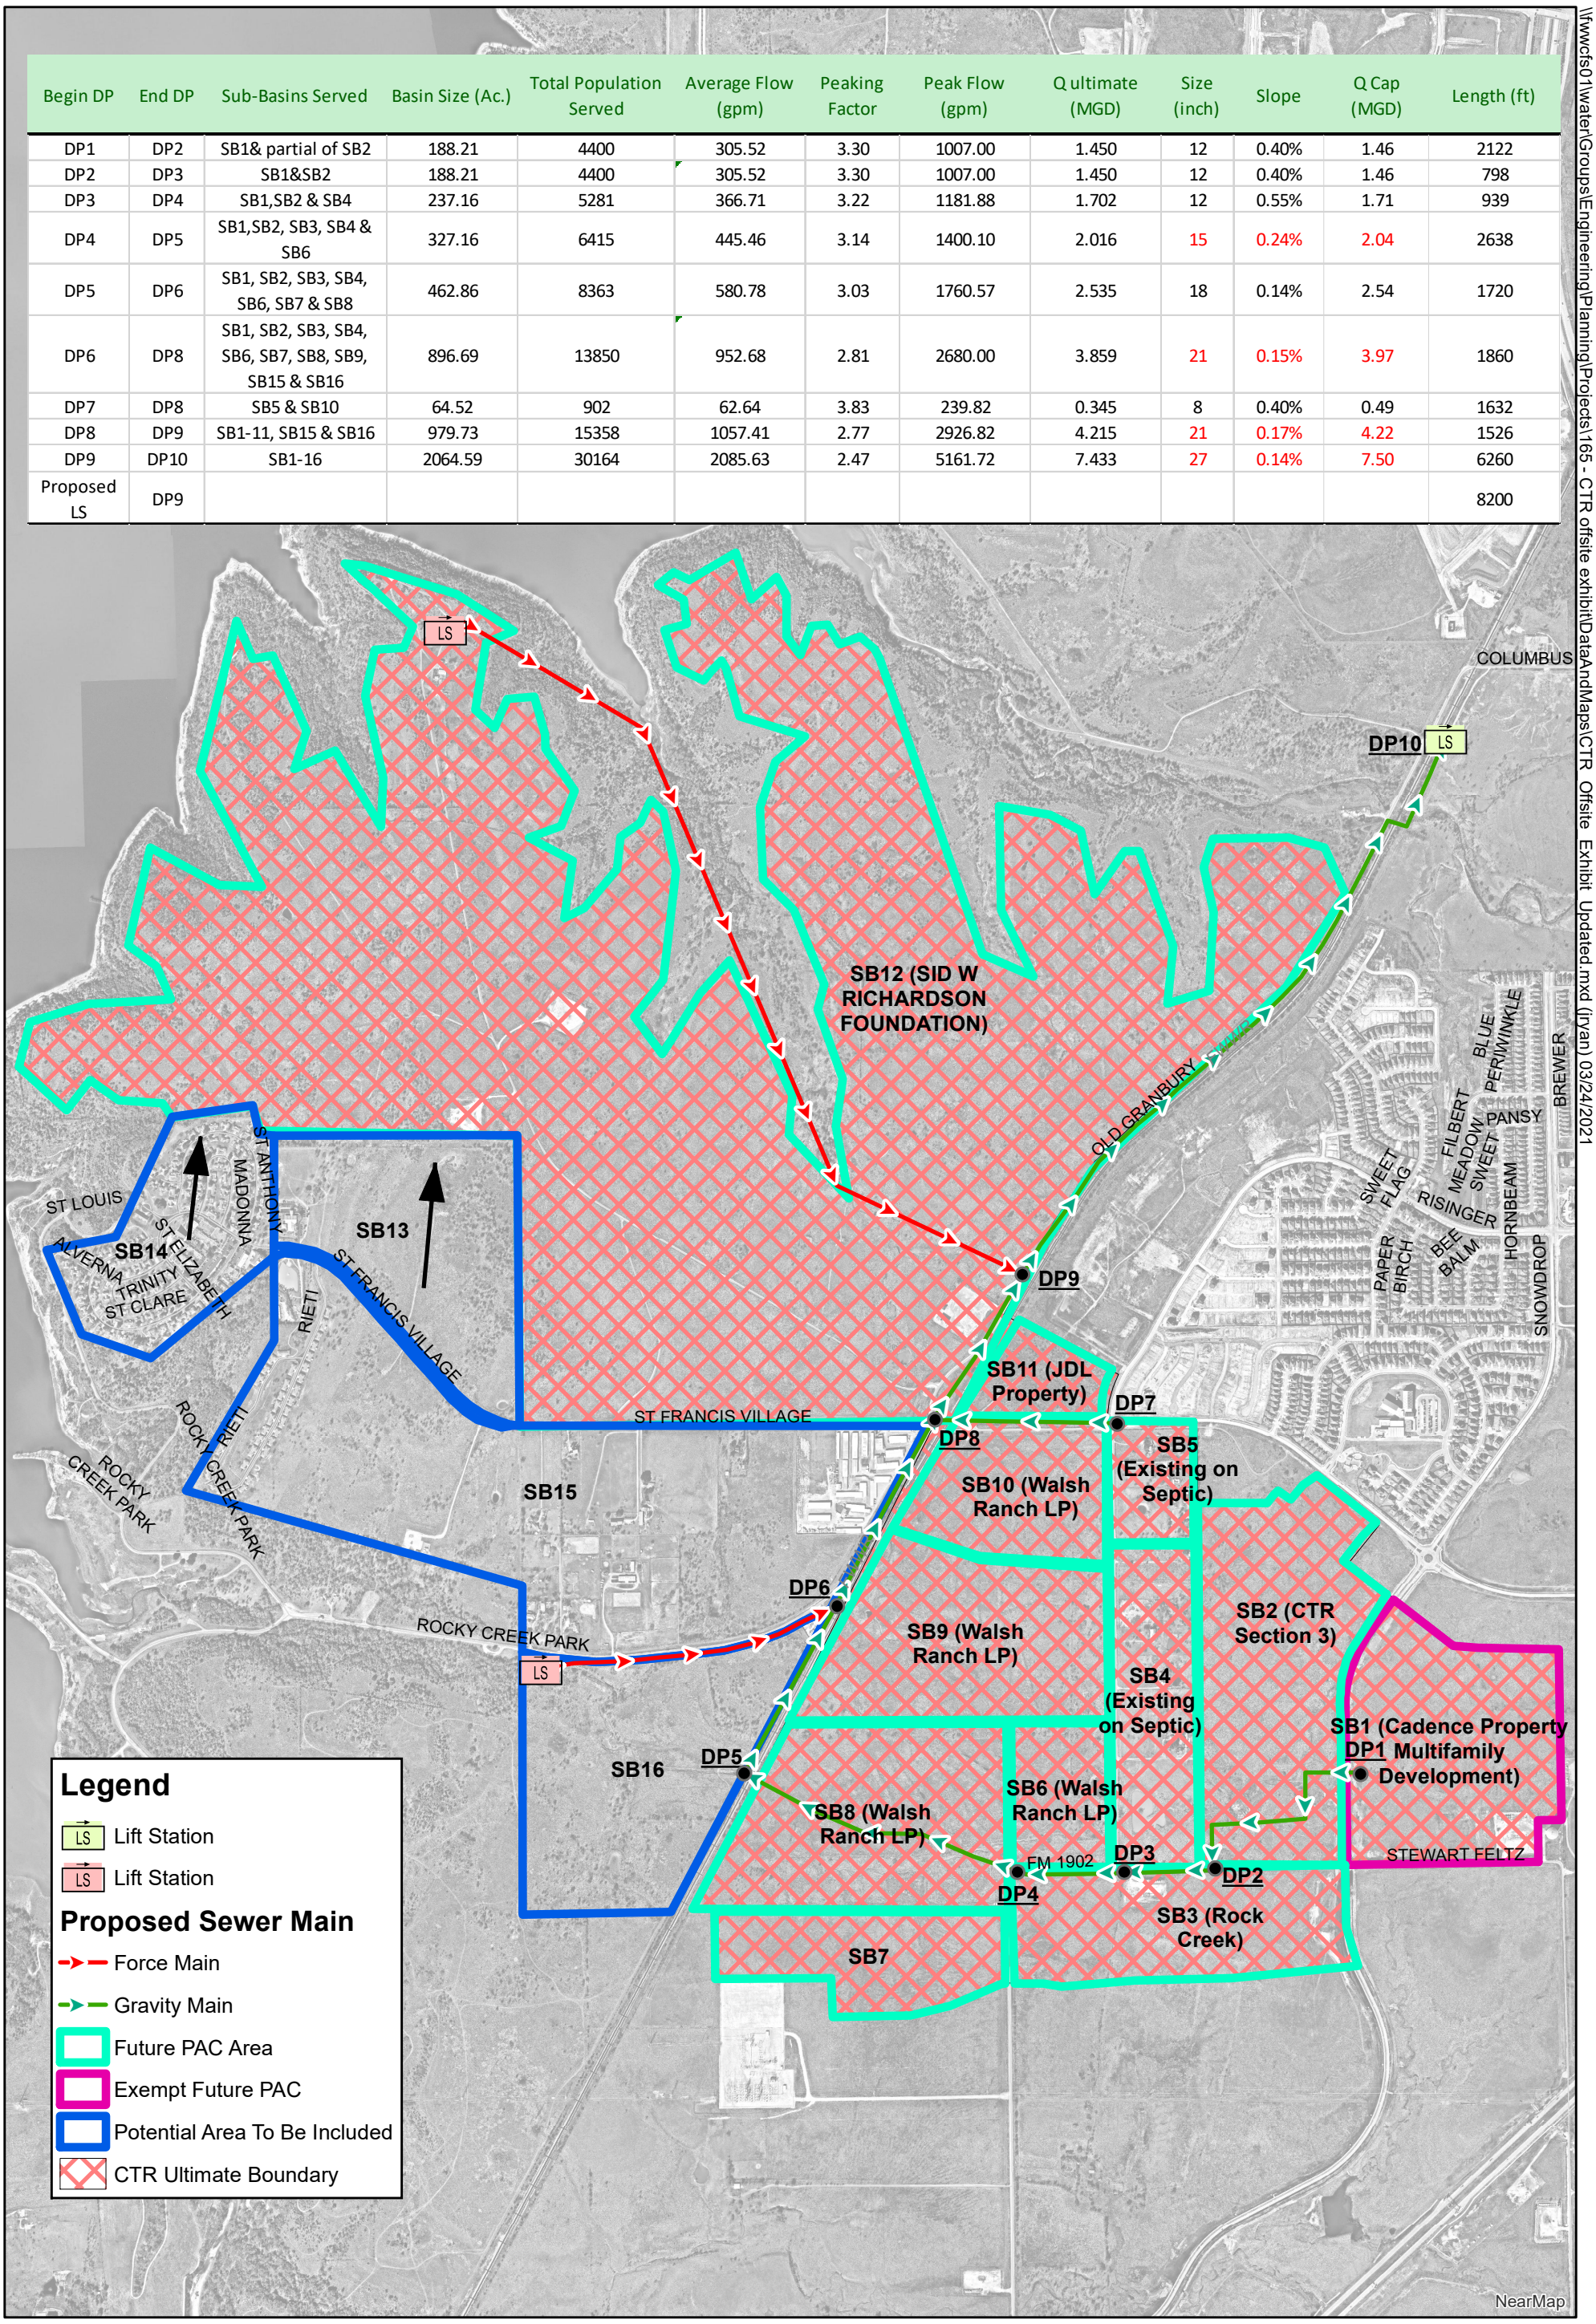

3/24/2021

COPYRIGHT 2021 CITY OF FORT WORTH
UNAUTHORIZED REPRODUCTION IS A VIOLATION OF APPLICABLE LAWS.

THIS DATA IS TO BE USED FOR A GRAPHICAL REPRESENTATION ONLY. THE ACCURACY IS NOT TO BE TAKEN / USED AS DATA PRODUCED FOR ENGINEERING PURPOSES OR BY A REGISTERED PROFESSIONAL LAND SURVEYOR. THE CITY OF FORT WORTH ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF SAID DATA.

Offsite Sewer Main - CTR

FORT WORTH WATER

0 500 1,000 2,000 Feet

N

\\fwwcfs01\waterGroups\Engineering\Planning\Projects\165 - CTR offsite exhibit\DataAndMaps\CTR Offsite Exhibit Updated.mxd (jryan) 03/24/2021